



Wiring Devices

USB Charger Receptacles / GFCI Receptacles / Receptacles / Switches / Plastic Wallplates





Durable,
Quality,
Powerful Solution...

Wiring Devices

Mertal Electrical Inc.





USB Charger Devices

USB A USB Charger Receptacles

USB C USB Charger Receptacles

Receptacles

Decorator Tamper Resistant Receptacles

Duplex Tamper Resistant Receptacles

Switches

Rocker In Wall Switches

Toggle In Wall Switches

Wallplates

Toggle Switch Plastic Wallplates

Duplex Plastic Wallplates

Decorator(Rectangular) Plastic Wallplates





Smart Chip For Safty Charging...



USB-A & USB-A USB Charger Receptacles

HIGH-SPEED USB CHARGER

Compatible with USB 2.0/3.0 Devices. USB port charger fit your iPhone, iPad, Android, tablets, and much more without the need of power adapters. Complete the charging quickly and save your time.

2 High-speed 4.8A/5V USB ports and 2 Standard electrical 15A/20A 125V Receptacles. Save Outlet Wall Plate space and USB adapters. Can be used for both home appliances and USB C+ USB charging Fast at the Same Time.


Quick Charge

MERTAL USB Charger complies with most popular protocols such as QC3.0 and AFC. It also supports BC1.2 and YD/T 1591 compliant devices and Apple iPhone.

- Support Qualcomm Quick Charge 2.0/3.0
- Support SCP/FCP /AFC
- Support USB DCP applying 2.7V on D+/ D-
- Meets BC1.2, YD/T 1591-2009



Model	Description	Rating	Color
MT15-U18W	In-Wall USB Charger with 2 High-Speed USB A ports and 15A Duplex Tamper Resistant Receptacle Back and Side Wired 2-Pole,3-Wire	Voltage: 125V AC, 60Hz Max load: 15A Output: 5V DC 3.6A	White Gray
MT20-U18W	In-Wall USB Charger with 2 High-Speed USB A ports and 20A Duplex Tamper Resistant Receptacle Back and Side Wired 2-Pole,3-Wire	Voltage: 125V AC, 60Hz Max load: 20A Output: 5V DC 3.6A	White Gray
MT15-U24W	In-Wall USB Charger with 2 High-Speed USB A ports and 15A Duplex Tamper Resistant Receptacle Back and Side Wired 2-Pole,3-Wire	Voltage: 125V AC, 60Hz Max load: 15A Output: 5V DC 4.8A	White Gray
MT20-U24W	In-Wall USB Charger with 2 High-Speed USB A ports and 20A Duplex Tamper Resistant Receptacle Back and Side Wired 2-Pole,3-Wire	Voltage: 125V AC, 60Hz Max load: 20A Output: 5V DC 4.8A	White Gray

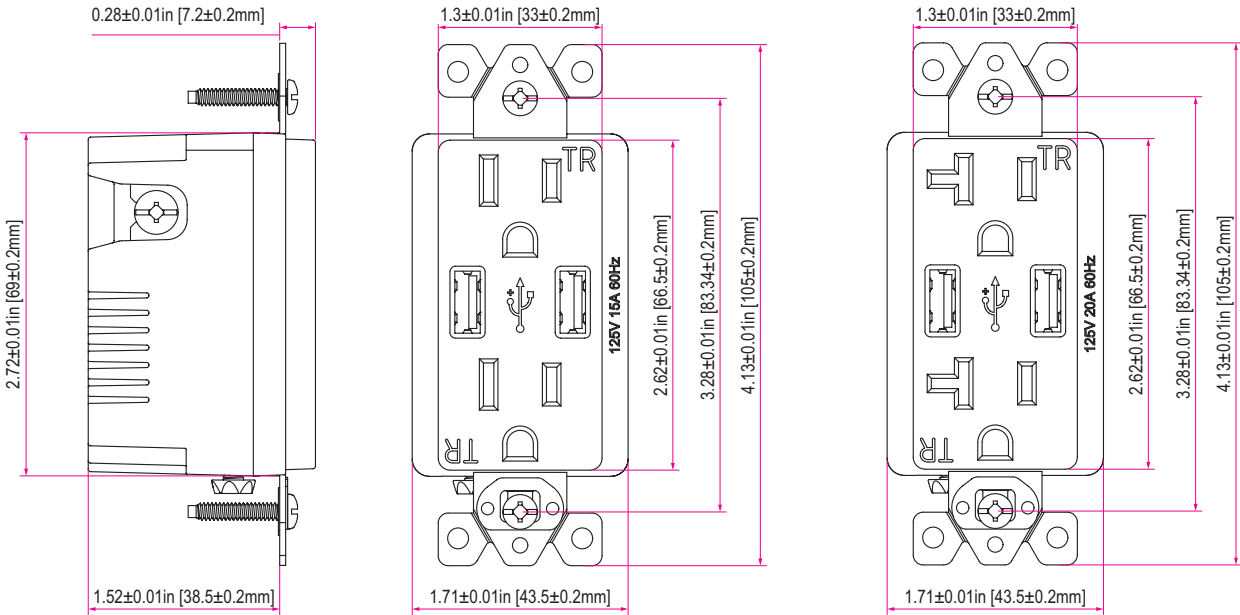



Model	Description	Rating	Color
MT15-QC20W	In-Wall 2 USB A Ports Fast Charger With 15A Duplex Tamper Resistant Receptacle PD Fast Charging Back and Side Wired 2-Pole,3-Wire	Voltage: 125V AC, 60Hz Max load: 15A Output: USB A1/USB A2: 5V/3A; 9V/2.22A; 12V/1.67A(20W MAX) USB A1+USB A2: 5V/3A	White Gray
MT20-QC20W	In-Wall 2 USB A Ports Fast Charger With 20A Duplex Tamper Resistant Receptacle PD Fast Charging Back and Side Wired 2-Pole,3-Wire	Voltage: 125V AC, 60Hz Max load: 20A Output: USB A1/USB A2: 5V/3A; 9V/2.22A; 12V/1.67A(20W MAX) USB A1+USB A2: 5V/3A	White Gray
MT15-QC40W	In-Wall 2 USB A Ports Fast Charger With 15A Duplex Tamper Resistant Receptacle PD Fast Charging with GaN technology Back and Side Wired 2-Pole,3-Wire	Voltage: 125V AC, 60Hz Max load: 15A Output: USB A1/USB A2: 5V/3A; 9V/2.22A; 12V/1.67A(20W MAX) USB A1+USB A2: 20W+20W(40W MAX)	White Gray
MT20-QC40W	In-Wall 2 USB A Ports Fast Charger With 20A Duplex Tamper Resistant Receptacle PD Fast Charging with GaN technology Back and Side Wired 2-Pole,3-Wire	Voltage: 125V AC, 60Hz Max load: 20A Output: USB A1/USB A2: 5V/3A; 9V/2.22A; 12V/1.67A(20W MAX) USB A1+USB A2: 20W+20W(40W MAX)	White Gray



More Power - Charge Faster...



USB-A & USB-C USB Charger Receptacles

USB-PD

PD Fast Charging (Power Delivery) is a standardized protocol from the USB Implementers Forum (USB-IF), designed to establish a universal charging standard that improves both efficiency and safety. The technology's standout advantage is its use of dynamic voltage and current adjustment to enable rapid, efficient charging. Thanks to its high-power capability and extensive compatibility, PD Fast Charging serves as a comprehensive fast-charging solution for devices from laptops and tablets to smartphones.

USB Charger Devices

- Powerful PD-enabled device connected to USB-C port.
- Charging time may be affected by the charging cord used.
- Built-in smart chip recognizes each device's individual charging requirements to optimize the charge.
- Gallium nitride (GaN) technology charging outlet achieve low heat temperature but higher charging efficiency.
- Tamper-Resistant receptacles improve child safety-built-in shutter prevents access by most non-rated/foreign objects.
- Back and side wire terminals accommodate.
- UL Certified, MERTAL USB outlets rigorously tested to meet UL1310 & UL498 standards for safety and reliability.
- FCC Certified.
- DOE Certified, Meets the Department of Energy Level VI.





Model	Description	Rating	Color
MT15-PD20W-1A1C	In-Wall USB A & USB C Fast Charger With 15A Duplex Tamper Resistant Receptacle PD Fast Charging Back and Side Wired 2-Pole,3-Wire	Voltage: 125V AC, 60Hz Max load: 15A Output: USB A+C: 5V/3A USB A: 5V/3A; 9V/2A; 12V/1.5A USB C: 5V/3A; 9V/2.22A; 12V/1.67A; PD3.0; PPS: 3.6-11V/ 2A	White Gray
MT20-PD20W-1A1C	In-Wall USB A & USB C Fast Charger With 20A Duplex Tamper Resistant Receptacle PD Fast Charging Back and Side Wired 2-Pole,3-Wire	Voltage: 125V AC, 60Hz Max load: 20A Output: USB A+C: 5V/3A USB A: 5V/3A; 9V/2A; 12V/1.5A USB C: 5V/3A; 9V/2.22A; 12V/1.67A; PD3.0; PPS: 3.6-11V/ 2A	White Gray
MT15-PD30W-1A1C	In-Wall USB A & USB C Fast Charger With 15A Duplex Tamper Resistant Receptacle PD Fast Charging with GaN technology Back and Side Wired 2-Pole,3-Wire	Voltage: 125V AC, 60Hz Max load: 15A Output: USB A+C: 5V/3A USB A: 5V/3A; 9V/2.22A; 12V/1.67A USB C: 5V/3A; 9V/3A; 12V/2.5A; 15V/2A; 20V/1.5A; PD3.0; PPS: 5-11V/2.7A	White Gray
MT20-PD30W-1A1C	In-Wall USB A & USB C Fast Charger With 20A Duplex Tamper Resistant Receptacle PD Fast Charging with GaN technology Back and Side Wired 2-Pole,3-Wire	Voltage: 125V AC, 60Hz Max load: 20A Output: USB A+C: 5V/3A USB A: 5V/3A; 9V/2.22A; 12V/1.67A USB C: 5V/3A; 9V/3A; 12V/2.5A; 15V/2A; 20V/1.5A; PD3.0; PPS: 5-11V/2.7A	White Gray



Model	Description	Rating	Color
MT15-PD45W-1A1C	In-Wall USB A & USB C Fast Charger With 15A Duplex Tamper Resistant Receptacle PD Fast Charging with GaN technology Back and Side Wired 2-Pole,3-Wire	Voltage: 125V AC, 60Hz Max load: 15A Output: USB A+C: 5V/3A USB A: 5V/3A; 9V/2.22A; 12V/1.67A USB C: 5V/3A; 9V/3A; 12V/3A; 15V/3A; 20V/2.25A; PD3.0; PPS: 5-16V/2.7A	White Gray
MT20-PD45W-1A1C	In-Wall USB A & USB C Fast Charger With 20A Duplex Tamper Resistant Receptacle PD Fast Charging with GaN technology Back and Side Wired 2-Pole,3-Wire	Voltage: 125V AC, 60Hz Max load: 20A Output: USB A+C: 5V/3A USB A: 5V/3A; 9V/2.22A; 12V/1.67A USB C: 5V/3A; 9V/3A; 12V/3A; 15V/3A; 20V/2.25A; PD3.0; PPS: 5-16V/2.7A	White Gray
MT15-PD65W-1A1C	In-Wall USB A & USB C Fast Charger With 15A Duplex Tamper Resistant Receptacle PD Fast Charging with GaN technology Back and Side Wired 2-Pole,3-Wire	Voltage: 125V AC, 60Hz Max load: 15A Output: USB A+C: 5V/3A USB A: 5V/3A; 9V/3A; 12V/2.5A USB C: 5V/3A; 9V/3A; 12V/3A; 15V/3A; 20V/3.25A; PD3.0; PPS: 5-21V/3A	White Gray
MT20-PD65W-1A1C	In-Wall USB A & USB C Fast Charger With 20A Duplex Tamper Resistant Receptacle PD Fast Charging with GaN technology Back and Side Wired 2-Pole,3-Wire	Voltage: 125V AC, 60Hz Max load: 20A Output: USB A+C: 5V/3A USB A: 5V/3A; 9V/3A; 12V/2.5A USB C: 5V/3A; 9V/3A; 12V/3A; 15V/3A; 20V/3.25A; PD3.0; PPS: 5-21V/3A	White Gray



Model	Description	Rating	Color
MT15-PD45W-2C	In-Wall 2 USB C Ports Fast Charger With 15A Duplex Tamper Resistant Receptacle PD Fast Charging with GaN technology Back and Side Wired 2-Pole,3-Wire	Voltage: 125V AC, 60Hz Max load: 15A Output: USB C1/USB C2: 5V/3A; 9V/3A; 12V/3A; 15V/3A; 20V/2.25A;PD3.0; PPS: 5-16V/2.8A(45W MAX) USB C1+USB C2: 30W+20W(50W MAX)	White Gray
MT20-PD45W-2C	In-Wall 2 USB C Ports Fast Charger With 20A Duplex Tamper Resistant Receptacle PD Fast Charging with GaN technology Back and Side Wired 2-Pole,3-Wire	Voltage: 125V AC, 60Hz Max load: 20A Output: USB C1/USB C2: 5V/3A; 9V/3A; 12V/3A; 15V/3A; 20V/2.25A;PD3.0; PPS: 5-16V/2.8A(45W MAX) USB C1+USB C2: 30W+20W(50W MAX)	White Gray
MT15-PD65W-2C	In-Wall 2 USB C Ports Fast Charger With 15A Duplex Tamper Resistant Receptacle PD Fast Charging with GaN technology Back and Side Wired 2-Pole,3-Wire	Voltage: 125V AC, 60Hz Max load: 15A Output: USB C1/USB C2: 5V/3A; 9V/3A; 12V/3A; 15V/3A; 20V/3.25A;PD3.0; PPS: 5-21V/3A(65W MAX) USB C1+USB C2: 45W+20W(65W MAX)	White Gray
MT20-PD65W-2C	In-Wall 2 USB C Ports Fast Charger With 20A Duplex Tamper Resistant Receptacle PD Fast Charging with GaN technology Back and Side Wired 2-Pole,3-Wire	Voltage: 125V AC, 60Hz Max load: 20A Output: USB C1/USB C2: 5V/3A; 9V/3A; 12V/3A; 15V/3A; 20V/3.25A;PD3.0; PPS: 5-21V/3A(65W MAX) USB C1+USB C2: 45W+20W(65W MAX)	White Gray



Model	Description	Rating	Color
MT15-PD25W-1A2C	In-Wall with 1 USB A & 2 USB C Fast Charger With 15A Duplex Tamper Resistant Receptacle PD Fast Charging Back and Side Wired 2-Pole,3-Wire	Voltage: 125V AC, 60Hz Max load: 15A Output: USB A: 5V/3A; 9V/2A; 12V/1.67A USB C1/USB C2: 5V/3A; 9V/2.78A; 12V/2.08A; 15V/1.67A; 20V/1.25A;PD3.2; PPS: 5-21V/1.25A; AVS: 9-20V/1.67A,1.25A(25W MAX) USB A+USB C1+USB C2: 5V/4.5A(22.5W MAX)	White Gray
MT20-PD25W-1A2C	In-Wall with 1 USB A & 2 USB C Fast Charger With 20A Duplex Tamper Resistant Receptacle PD Fast Charging Back and Side Wired 2-Pole,3-Wire	Voltage: 125V AC, 60Hz Max load: 20A Output: USB A: 5V/3A; 9V/2A; 12V/1.67A USB C1/USB C2: 5V/3A; 9V/2.78A; 12V/2.08A; 15V/1.67A; 20V/1.25A;PD3.2; PPS: 5-21V/1.25A; AVS: 9-20V/1.67A,1.25A(25W MAX) USB A+USB C1+USB C2: 5V/4.5A(22.5W MAX)	White Gray
MT15-PD35W-1A2C	In-Wall with 1 USB A & 2 USB C Fast Charger With 15A Duplex Tamper Resistant Receptacle PD Fast Charging Back and Side Wired 2-Pole,3-Wire	Voltage: 125V AC, 60Hz Max load: 15A Output: USB A: 5V/3A; 9V/3A; 12V/2.5A(30W MAX) USB C1/USB C2: 5V/3A; 9V/3A; 12V/2.92A; 15V/2.33A; 20V/1.75A;PD3.2; PPS: 5-21V/1.75A; AVS: 9-20V/2.33A,1.75A(35W MAX) USB A+USB C1+USB C2: 5V/4.5A(22.5W MAX)	White Gray
MT20-PD35W-1A2C	In-Wall with 1 USB A & 2 USB C Fast Charger With 20A Duplex Tamper Resistant Receptacle PD Fast Charging Back and Side Wired 2-Pole,3-Wire	Voltage: 125V AC, 60Hz Max load: 20A Output: USB A: 5V/3A; 9V/3A; 12V/2.5A(30W MAX) USB C1/USB C2: 5V/3A; 9V/3A; 12V/2.92A; 15V/2.33A; 20V/1.75A;PD3.2; PPS: 5-21V/1.75A; AVS: 9-20V/2.33A,1.75A(35W MAX) USB A+USB C1+USB C2: 5V/4.5A(22.5W MAX)	White Gray




Model	Description	Rating	Color
MT15-PD45W-1A2C	In-Wall with 1 USB A & 2 USB C With 15A Duplex Tamper Resistant Receptacle PD Fast Charging with GaN technology Back and Side Wired 2-Pole,3-Wire	Voltage: 125V AC, 60Hz Max load: 15A Output: USB A: 5V/3A; 9V/3A; 12V/2.5A USB C1/USB C2: 5V/3A; 9V/3A; 12V/3A; 15V/3A; 20V/2.25A;PD3.2; PPS: 5-21V/2.25A; AVS: 9-20V/3A,2.25A(45W MAX) USB A+USB C1+USB C2: 5V/4.5A(22.5W MAX)	White Gray
MT20-PD45W-1A2C	In-Wall with 1 USB A & 2 USB C With 20A Duplex Tamper Resistant Receptacle PD Fast Charging with GaN technology Back and Side Wired 2-Pole,3-Wire	Voltage: 125V AC, 60Hz Max load: 20A Output: USB A: 5V/3A; 9V/3A; 12V/2.5A USB C1/USB C2: 5V/3A; 9V/3A; 12V/3A; 15V/3A; 20V/2.25A;PD3.2; PPS: 5-21V/2.25A; AVS: 9-20V/3A,2.25A(45W MAX) USB A+USB C1+USB C2: 5V/4.5A(22.5W MAX)	White Gray
MT15-PD65W-1A2C	In-Wall with 1 USB A & 2 USB C With 15A Duplex Tamper Resistant Receptacle PD Fast Charging with GaN technology Back and Side Wired 2-Pole,3-Wire	Voltage: 125V AC, 60Hz Max load: 15A Output: USB A: 5V/3A; 9V/3A; 12V/2.5A USB C1/USB C2: 5V/3A; 9V/3A; 12V/3A; 15V/3A; 20V/3.25A;PD3.2; PPS: 5-21V/3.25A;AVS: 9-20V/3A, 3.25A(65W MAX) USB A+USB C1+USB C2: 5V/4.5A(22.5W MAX)	White Gray
MT20-PD65W-1A2C	In-Wall with 1 USB A & 2 USB C With 20A Duplex Tamper Resistant Receptacle PD Fast Charging with GaN technology Back and Side Wired 2-Pole,3-Wire	Voltage: 125V AC, 60Hz Max load: 20A Output: USB A: 5V/3A; 9V/3A; 12V/2.5A USB C1/USB C2: 5V/3A; 9V/3A; 12V/3A; 15V/3A; 20V/3.25A;PD3.2; PPS: 5-21V/3.25A;AVS: 9-20V/3A, 3.25A(65W MAX) USB A+USB C1+USB C2: 5V/4.5A(22.5W MAX)	White Gray



Model	Description	Rating	Color
MT15-PD45WPro-1A1C	In-Wall USB A & USB C Fast Charger With 15A Duplex Tamper Resistant Receptacle PD Fast Charging with GaN technology Back and Side Wired 2-Pole,3-Wire	Voltage: 125V AC, 60Hz Max load: 15A Output: USB A+C: 20W+30W(50W MAX) USB A: 5V/3A; 9V/3A; 12V/2.5A USB C: 5V/3A; 9V/3A; 12V/3A; 15V/3A; 20V/2.25A; PD3.0; PPS: 5-16V/2.8A(45W MAX)	White Gray
MT20-PD45WPro-1A1C	In-Wall USB A & USB C Fast Charger With 20A Duplex Tamper Resistant Receptacle PD Fast Charging with GaN technology Back and Side Wired 2-Pole,3-Wire	Voltage: 125V AC, 60Hz Max load: 20A Output: USB A+C: 20W+30W(50W MAX) USB A: 5V/3A; 9V/3A; 12V/2.5A USB C: 5V/3A; 9V/3A; 12V/3A; 15V/3A; 20V/2.25A; PD3.0; PPS: 5-16V/2.8A(45W MAX)	White Gray
MT15-PD65WPro-1A1C	In-Wall USB A & USB C Fast Charger With 15A Duplex Tamper Resistant Receptacle PD Fast Charging with GaN technology Back and Side Wired 2-Pole,3-Wire	Voltage: 125V AC, 60Hz Max load: 15A Output: USB A+C: 20W+45W(65W MAX) USB A: 5V/3A; 9V/3A; 12V/2.5A USB C: 5V/3A; 9V/3A; 12V/3A; 15V/3A; 20V/3.25A; PD3.0; PPS: 5-21V/3A(65W MAX)	White Gray
MT20-PD65WPro-1A1C	In-Wall USB A & USB C Fast Charger With 20A Duplex Tamper Resistant Receptacle PD Fast Charging with GaN technology Back and Side Wired 2-Pole,3-Wire	Voltage: 125V AC, 60Hz Max load: 20A Output: USB A+C: 20W+45W(65W MAX) USB A: 5V/3A; 9V/3A; 12V/2.5A USB C: 5V/3A; 9V/3A; 12V/3A; 15V/3A; 20V/3.25A; PD3.0; PPS: 5-21V/3A(65W MAX)	White Gray



More Protection. More Functionality



Tamper-Resistant and Tamper & Weather Resistant GFCI Receptacles


MERTAL 15A/20A GFCI Outlet Receptacle, Self-Test GFCI with LED Indicator, Tamper Resistant, Weather Resistant, Decorative Wallplate Included, UL Listed.

15AMP/20AMP GFCI OUTLET


The Receptacles continuously protect ground fault; prevent personal injury and risks of electrical fire caused by ground fault; a must have for household electricity.

TAMPER RESISTANT & WEATHER RESISTANT

Tamper proof preventing accidental insertion of objects, or mistakenly touch of children; Weather Resistant perfect for humid or outdoor environment like bathroom, balcony, kitchen.

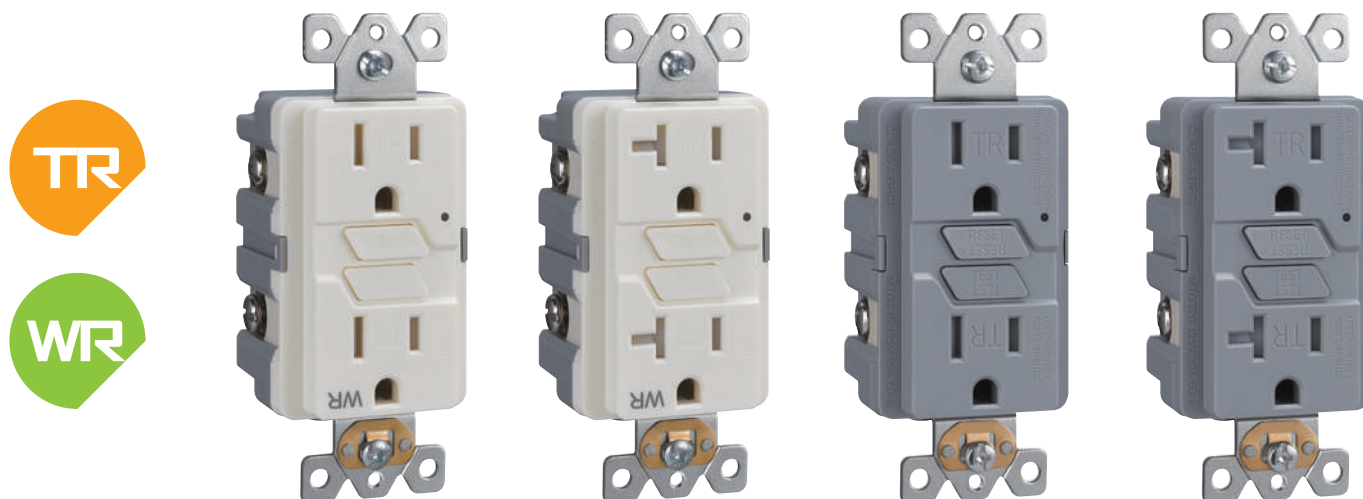

Model	Description	Rating	Color
MTGW15	Tamper and Weather Resistant Self-Testing, Self Grounding GFCI	NEMA 5-15, 125V/60Hz	White Gray
MTGW20	Tamper and Weather Resistant Self-Testing, Self Grounding GFCI	NEMA 5-20, 125V/60Hz	White Gray
MTGT15	Tamper-Resistant Self Testing, Self Grounding GFCI	NEMA 5-15, 125V/60Hz	White Gray
MTGT20	Tamper-Resistant Self Testing, Self Grounding GFCI	NEMA 5-20, 125V/60Hz	White Gray

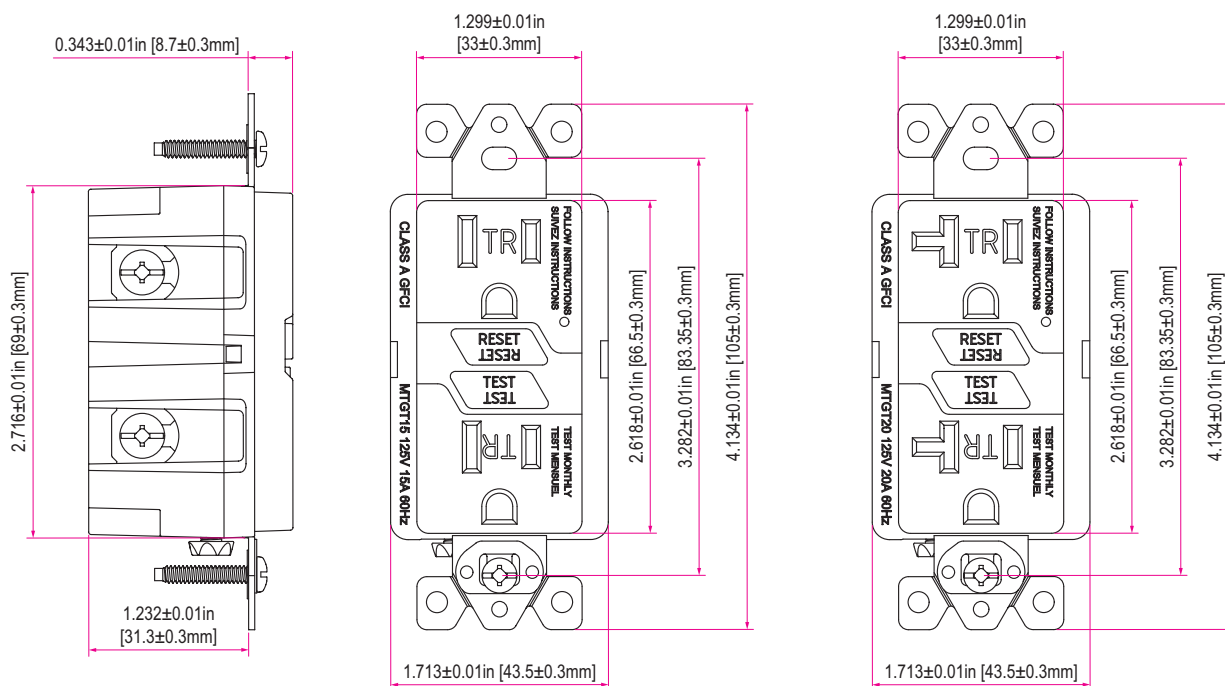



New 2008 NEC® Requirements for Receptacles



Duplex Tamper-Resistant Receptacles

Tamper resistant receptacles are designed to keep children safe because they keep objects like prying fingers, safety pins and keys out.


Tamper resistant receptacles from Mertal wiring devices help keep children safe from electrical injury and provide better protection than traditional receptacles with removable plastic safety caps. UL listed safety shutter system prevents the insertion of foreign objects into the receptacles. Tamper resistant receptacles — the full line to meet the 2008 NEC® and enhance child safety. The safety shutters will only open upon insertion of a 2-prong or 3-prong plug.

Duplex Tamper-Resistant Receptacles

- Impact-resistant thermoplastic cover and body
- All terminal and mounting screws combination head
- Easy-to-read "TR" markings onto face
- Tamper resistant version features dual mechanical shutter system to help prevent insertion of foreign objects
- Smooth face does not collect dirt
- All devices fit standard wall boxes and are suitable for ganging



Model	Description	Rating	Color
MTRT15	Standard Duplex Receptacle, Tamper-Resistant, Back and Side Wired Self-Grounding	15A/125V, 5-15R	White Light Almond Ivory Gray
MTRT20	Standard Duplex Receptacle, Tamper-Resistant, Back and Side Wired Self-Grounding	20A/125V, 5-20R	White Light Almond Ivory Gray

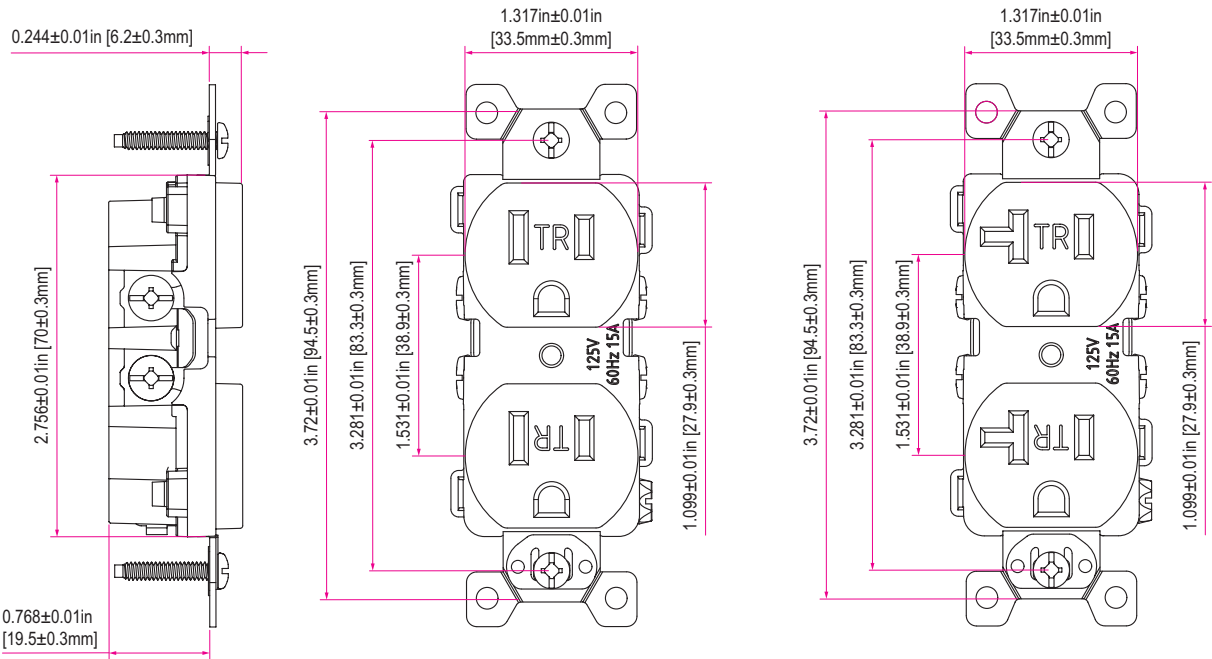



We believe that details determine quality.



Decorator Tamper-Resistant Receptacles

Mertal Tamper Resistant Solutions

Mertal's patented Cam Action Technology makes inserting a plug as easy as plugging into a standard receptacle. This design has been incorporated into our Industrial, Hospital, Commercial and Residential receptacles. This broad offering ensures the right quality product for all projects.


All 125 volt, 15 and 20 amp receptacles shall be listed tamper resistant receptacles per NEC® Article 406.11, Tamper-resistant receptacles in dwelling units. Tamper resistant receptacles incorporate internal mechanisms to limit access to energized internal components.

Decorator Tamper-Resistant Receptacles

- Made of polycarbonate
- Side wire terminals accept #12 or #14 AWG solid copper or stranded wire
- Shallow design for maximum wiring room
- All devices fit standard wall boxes and are suitable for ganging
- Easy-access green hex head ground screw
- Captive mounting screws
- Washer-type break-off plaster ear for best flush alignment
- Large head combination screws for fast wiring



Model	Description	Rating	Color
MRDT15	Duplex Receptacle, Tamper-Resistant, Back and Side Wired Self-Grounding	15A/125V, 5-15R	White Light Almond Ivory Gray
MTDT20	Duplex Receptacle, Tamper-Resistant, Back and Side Wired Self-Grounding	20A/125V, 5-20R	White Light Almond Ivory Gray

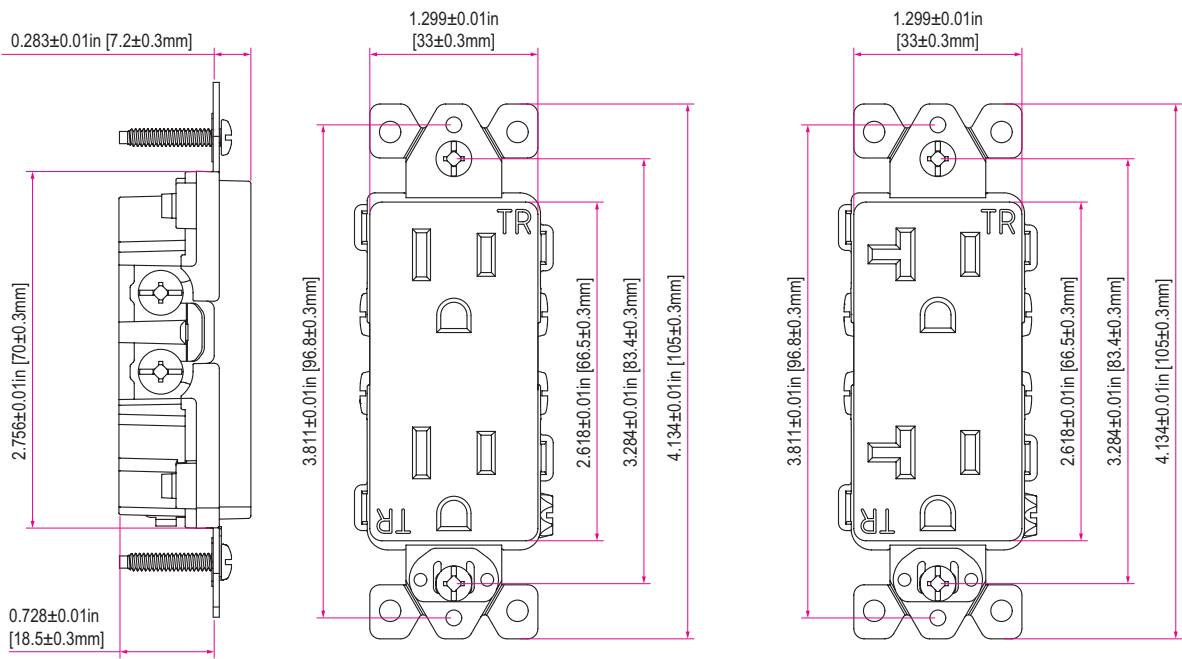



Safety - Aesthetics - Intelligence




Toggle In-Wall Switchs

Mertal offer toggle switches for residential and commercial applications, with high quality materials and testing that far exceeds standards.





Replacing an old or broken light switch has never been easier with Mertal's toggle light switch, single pole and three way standard wall switch, 15 Amp switch toggle, 120V. Perfect for new or replacement installations. Ideal for use in residential and commercial 15 amp switch applications, these wall switches are UL and CUL listed for certified safety.

Decorator Tamper-Resistant Receptacles

- Faster installation with combination of side wiring and push-in wiring
- Push-in terminals accept #14 solid wire only
- Easy-access green hex head ground screw
- Captive mounting screws
- Steel mounting strap, made of galvanized steel sheet for corrosion resistance
- Washer-type break-off plaster ear for best flush alignment
- Large head combination screws for fast wiring

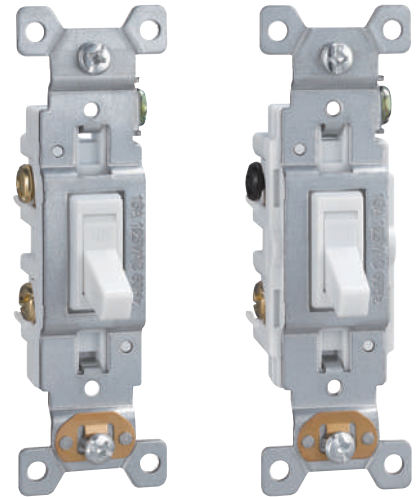

Model	Description	Rating	Color
MTTSS	15AMP Push-In and Side Wired Single-Pole	120-277V AC 15AMP	White Ivory
MTTSD	15AMP Push-In and Side Wired Three-Way	120-277V AC 15AMP	White Ivory

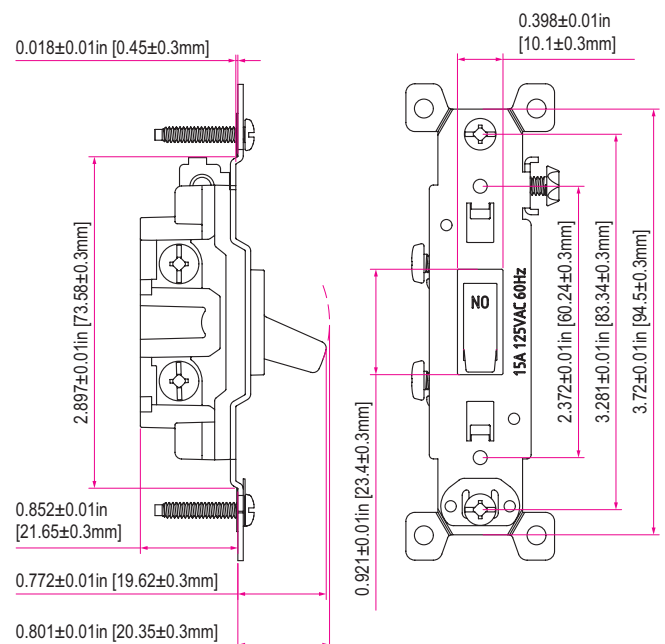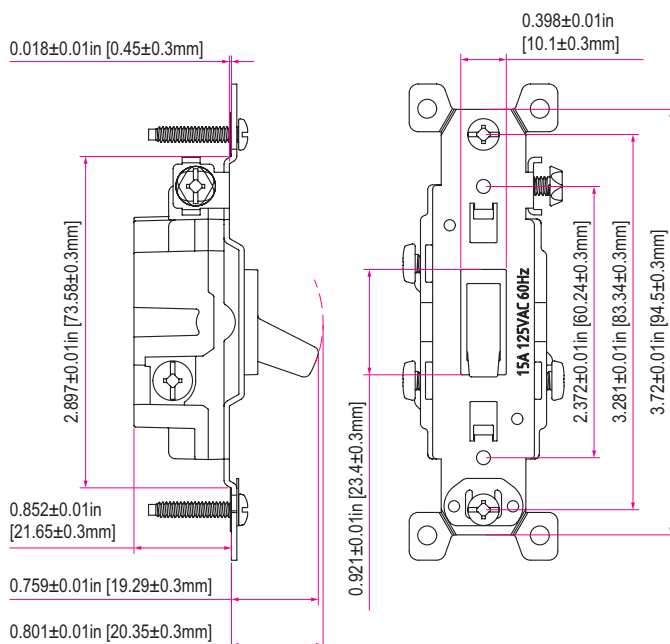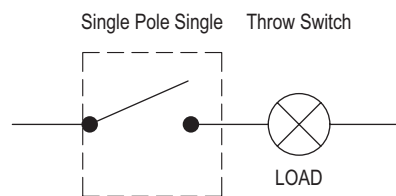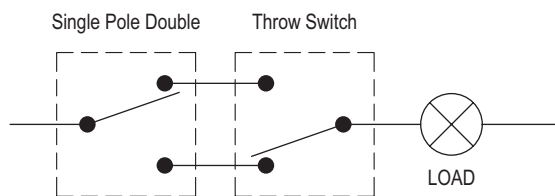



Your every touch deserves to be treated with tenderness.



Rocker In-Wall Switches


The AC quiet decorator switch, with its 15AMP Push-In and side wired capabilities, is engineered to deliver silent and efficient function, enhancing both the usability and aesthetic of its environment. Let's delve into the specifics of this single-pole model's features and how they benefit the user.

Silent operation the 'Quiet' in its name is indicative of the switch's design to operate without the common "Click" associated with traditional switches. This feature is particularly advantageous in environments like bedrooms, study areas, or office spaces, where minimal noise is a necessity.





Efficient wiring options the switch provides flexible wiring options with 'Push-In' connectors and side wiring, facilitating easy installation and reliable electrical connections. The 15AMP rating ensures compatibility with a wide range of lighting fixtures and appliances.

Rocker In-Wall Switches

- Impact resistant thermoplastic construction assures long life durability
- All decorator devices are UL listed
- Smooth, quiet paddle action
- Narrow body leaves more room for wires in the box
- High-impact resistant thermoplastic construction
- Washer-type break off plaster ears for best flush alignment
- Captive mounting screws
- Push in terminals for quick installation
- Easy-access green hex head ground screw

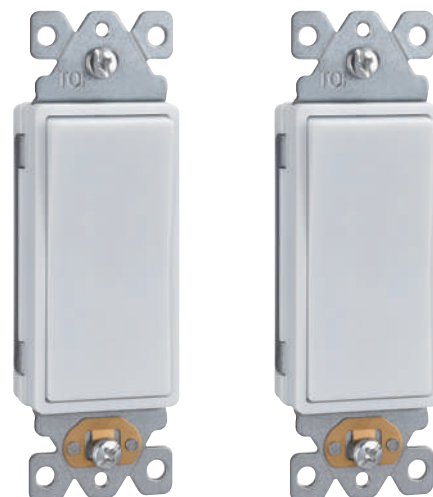

Model	Description	Rating	Color
MTRSS	AC Quiet Decorator Switch 15AMP Push-In and Side Wired Single-Pole	15A 120/277 VAC	White Ivory
MTRSD	AC Quiet Decorator Switch 15AMP Push-In and Side Wired Three-Way	15A 120/277 VAC	White Ivory

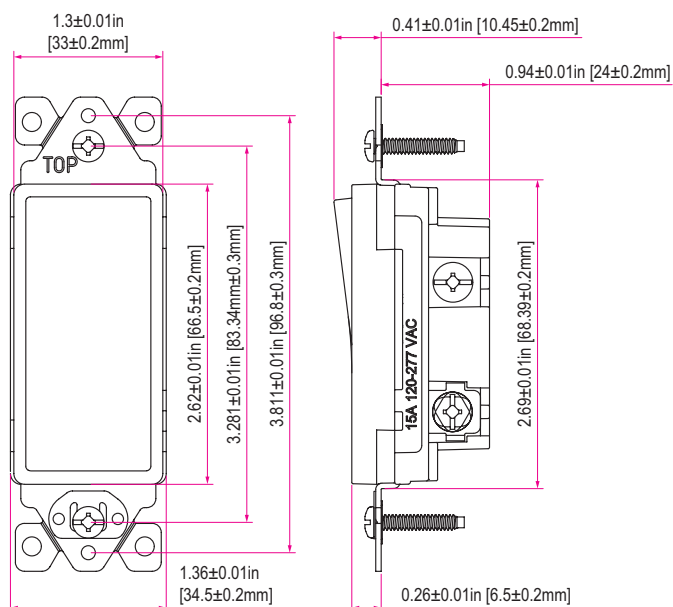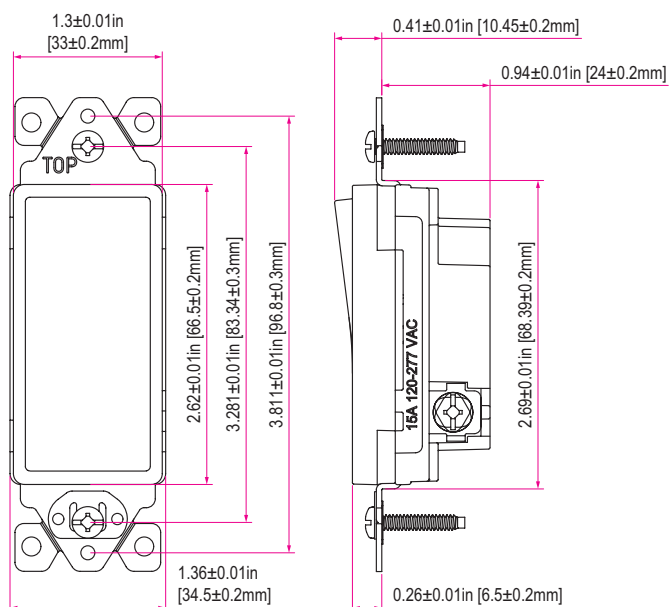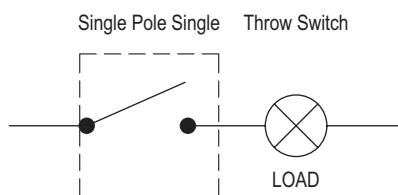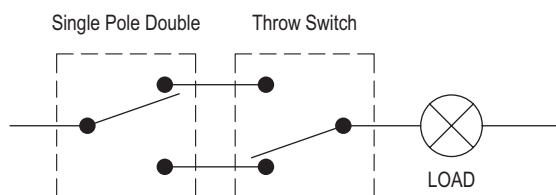



Inherit classics, Create fashion



Plastic Wallplates

A Variety of Wall Plates Options

Mertal provides a variety of wall plates with multi-gang options to match for any home decor. Made perfectly flat to lay flush against the wall. Smooth finish is easy to clean and scratch resistant.


Mertal provides unbreakable polycarbonate wall plates to best match your receptacles, switches, dimmers, timers, sensors, GFCIs, USB receptacles and other devices.

AVAILABLE COLORS





Toggle Switch Plastic Wallplates

- Made of polycarbonate
- High-impact resistance limits access to live parts due to breakage
- Smooth finish without recessed lines is easy to clean and maintain attractive appearance
- Various colors available

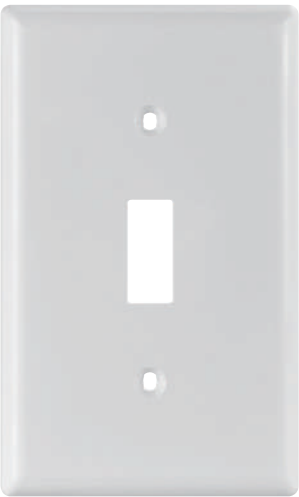


Model	Description	Color
MT-7011	Toggle Switch Plastic Wallplates Single Gang	White Ivory Light Almond Almond Gray

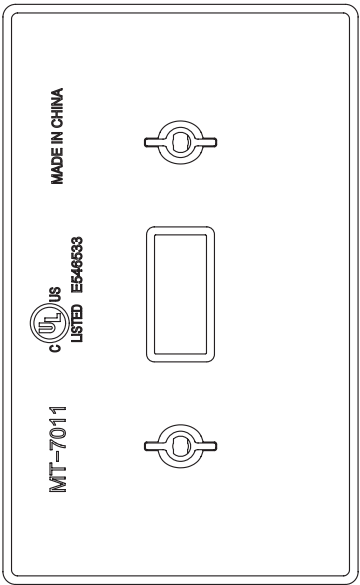
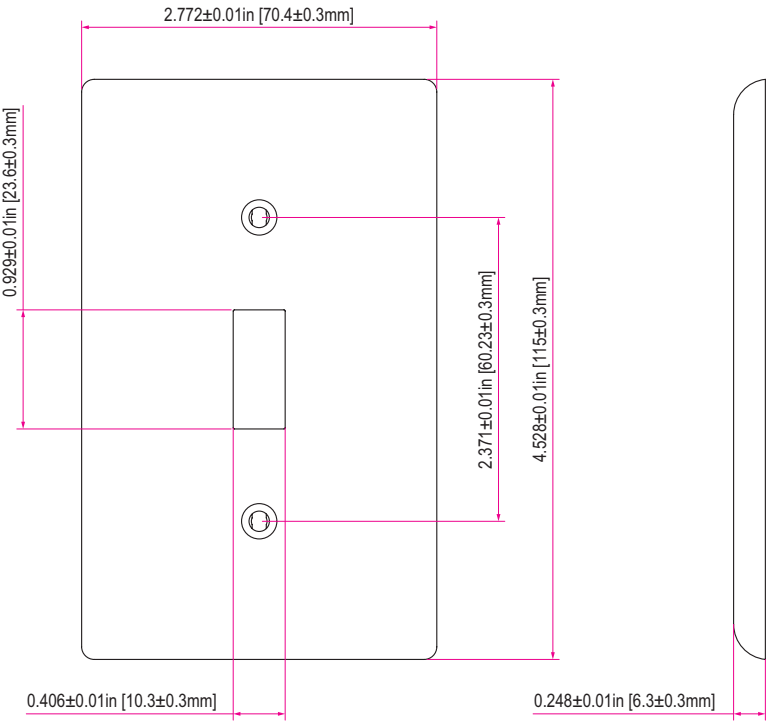


Duplex Receptacle Plastic Wallplates

- Made of polycarbonate
- High-impact resistance limits access to live parts due to breakage
- Smooth finish without recessed lines is easy to clean and maintain attractive appearance
- Various colors available

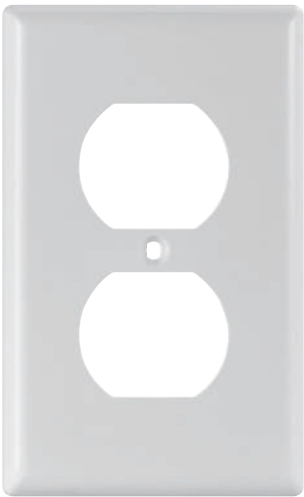


Model	Description	Color
MT-7021	Duplex Plastic Wallplates Single Gang	White Ivory Light Almond Almond Gray

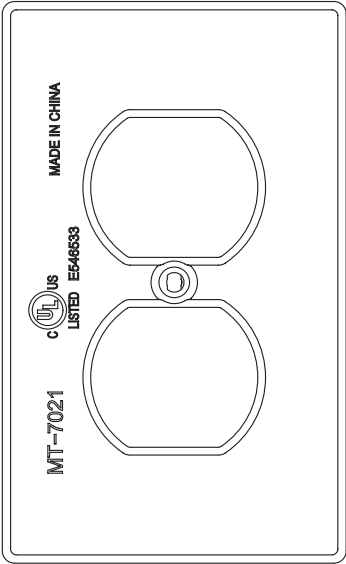
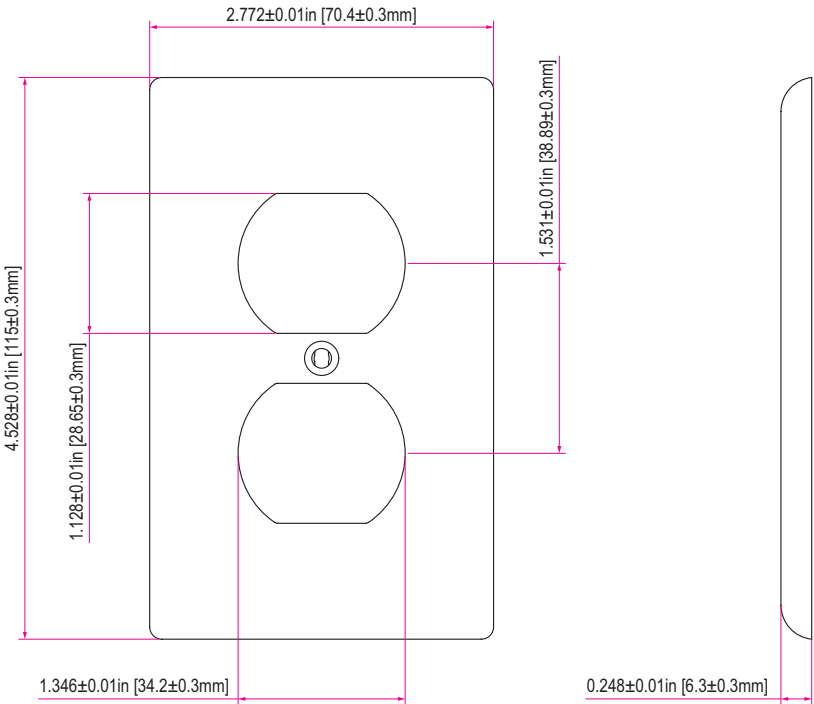


Decorator/GFCI Plastic Wallplates

- Made of polycarbonate
- High-impact resistance limits access to live parts due to breakage
- Smooth finish without recessed lines is easy to clean and maintain attractive appearance
- Various colors available

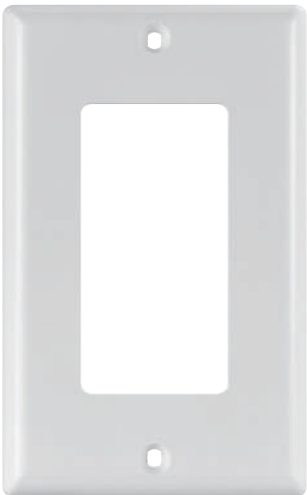

Model	Description	Color
MT-7031	Decorator (Rectangular) Plastic Wallplate Single Gang	White Ivory Light Almond Almond Gray

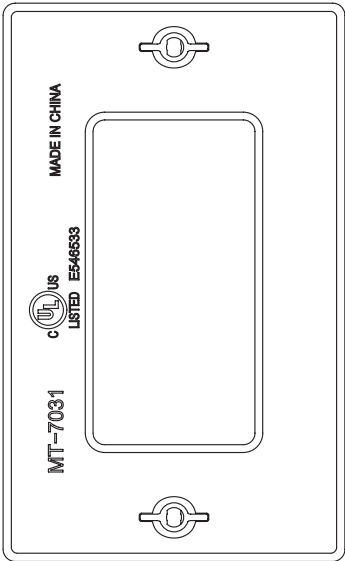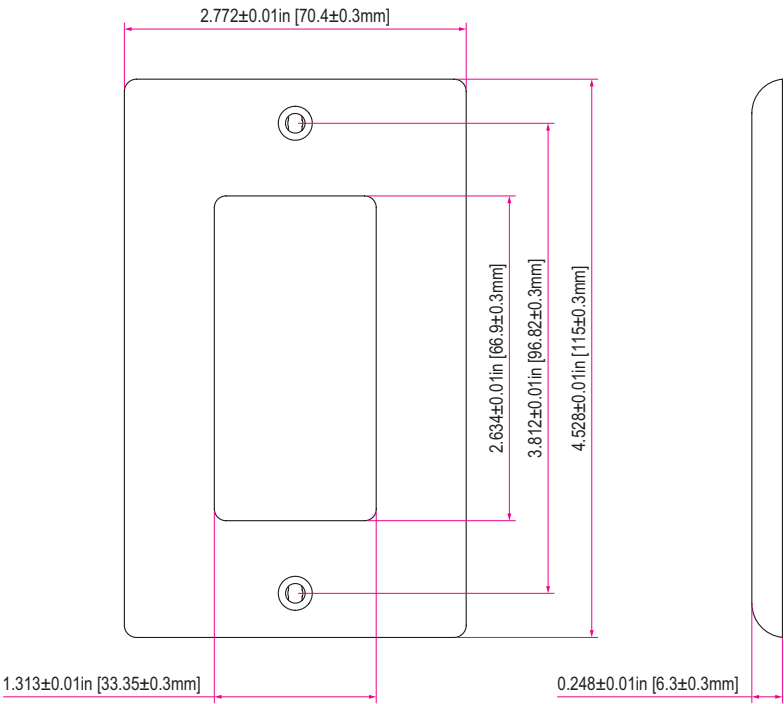

Mertal Electrical Inc.

Address: 131-25 31th ave Flushing NY 11354

Tel: 516-866-7888

E-mail: sales@mertal.com

www.mertal.com